

GTCH-Series Multi-Cartridge Liquid Filter Vessels


GTCH Series Multi-Round Cartridge Vessels are designed for industrial and high purity applications. Vessels are constructed of 304 or 316 stainless steel and accept DOE, 222/FLAT and 222/FIN end cartridges in 10, 20, 30 & 40 inch lengths.

Features

- 304 or 316L stainless steel construction option:
- 150 PSI pressure rating standard
- Single o-ring design (Buna standard)
- Easy-access eye-nuts/swing-bolt closure
- Universal seat cups and alternate compression hold-down plates allow vessels to accept DOE, 222/FLAT or 222/ FIN cartridges
- Heavy-duty welded angle mounting/support leg
- Bearing-assisted hand-wheel closure davit (GTCH12 & larger)

Options

- ASME Code Stamp
- Electropolished Finish
- Sanitary Porting
- Alternate Seal Materials
 - EPDM
 - Teflon® Encapsulated Viton®
 - Viton®

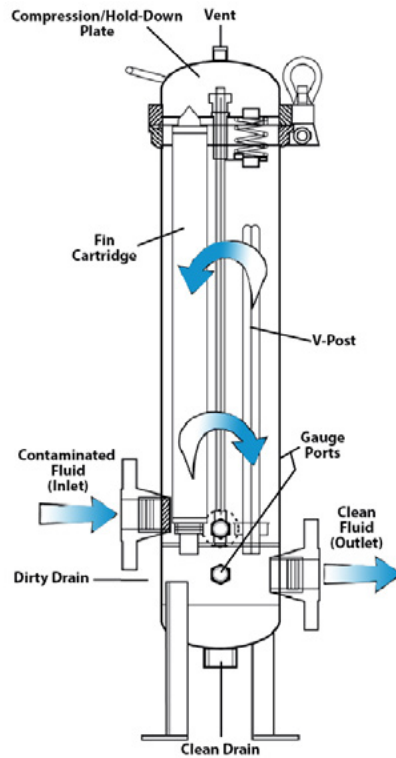

Ordering Information

GTCH	# of Cartridges	Length	Inlet/Outlet Size	Inlet/Outlet Style	Outlet	Material	Pressure Rating	Surface Finish	ASME Code Stamp
	3	1 = 10"	1 = 1"	N = FNPT	1 = Bottom Outlet	4 = 304 SS	15 = 150 PSI @ 250°F	EP = Electropolished	Blank = None
	5	2 = 20"	1.5 = 1.5"	F = RF Flange	2 = Opposite Outlet	6 = 316L SS		GB = Glass Bead	U = ASME
	7	3 = 30"	2 = 2"	T = TC ferrule					
	12	4 = 40"	3 = 3"						
	21		4 = 4"						
	36		6 = 6"						
	51		8 = 8"						

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.