

JLP Series

TRI-SHIELD™ Liquid Particulate Cartridges for solid contaminant removal in a wide range of applications.

TRI-SHIELD cartridges for liquid vessels are used to filter solid and semi solid contaminants in mid stream oil & gas, refining, chemical, food & beverage and a range of general industrial applications.

With up to 30% lower initial differential pressures and 3 times greater dirt holding capacity, TRI-SHIELD cartridges have superior filtration performance when compared to resin bonded, melt blown, string wound and sock filters in liquid applications.


TRI-SHIELD provides for **up to 5X*** the flow rate compared to competing thermally bonded gradient depth technologies with the same initial dP providing higher through put and longer life.

Features and benefits

- The blend of engineered cylindrical and TRI-Lobal fibers are specified to deliver true gradient depth for superior dirt loading compared to conventional depth cartridges.
- Patented design and manufacturing maximizes void space while maintaining high efficiencies and maximizing dirt loading.
- Efficiency controlled by blending denier rated fibers into an engineered media for repeatable filtration performance.
- Robust bonded matrix prevents media compression to prevent any contaminant unloading.
- Coreless design allows for easier disposal and better chemical compatibility.
- Resin and binder free design drives greater deformable and shear sensitive contaminant capacity.
- Textured cartridge with a coarse finish designed to improve filtration performance.




TRI-SHIELD DELIVERS HALF THE DIFFERENTIAL PRESSURE AT STARTUP*

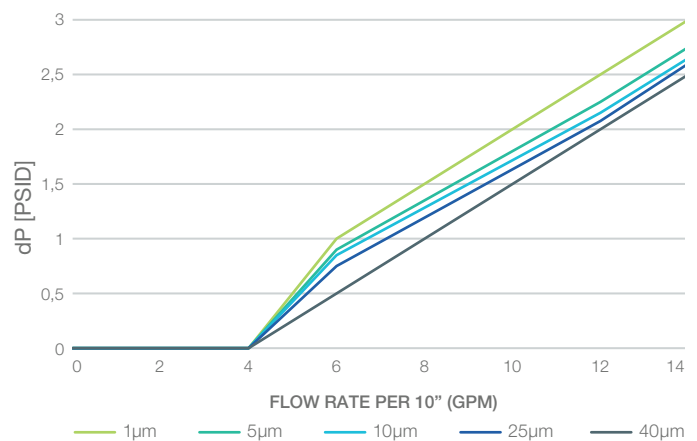

* Compared to PECO PEACH Cartridges and other depth filtration technology.

PECO & PEACH are registered trademarks of Parker Hannifin Filtration (US) Inc. There is no affiliation between Jonell Filtration Products, Inc. and Parker Hannifin Filtration (US) Inc.

Specifications

Products	Specifications	Liquid Particulate Cartridge	
	Diameter	2.50", 2.750", 3.00", 6.00"	
	Nominal Lengths	9.75", 10", 19.5", 20", 29.25", 30", 36", 40", 47", 60"	
	Media type	Depth Style Polyester	Depth Style Polypropylene
	Gasket	No Gasket Buna-N EPR	Viton Silicone TES
	Micron Range	1μ, 5μ, 10μ, 25μ, 40μ, 50μ, 60μ, 75μ	1μ, 5μ, 10μ, 25μ, 40μ
	Efficiency	90%, 99.9%	
	End cap style	Double Open Ended Spring/Extension Finned/222 O-ring Finned/Extension 222 O-ring/Closed	222 O-ring/Spring Spring Extension 226 O-ring/Closed Finned/226 O-ring
	End caps & cores	Polyester Polypropylene	Carbon Steel Stainless Steel
	Temperature	240-degree F for Polyester	180-degree F for Polypropylene
	Common Applications	Condensate, Amine & Glycol Acids & Alkali, Solvents Catalyst Disposal Injection & Lubricants Inks, Adhesives, Fabric Coatings, Paints, Dyes	Product Polishing Bulk Chemical Filtration Bottled Water Beer Filtration (resin trap) Pulp & Paper Waste Water

Other configurations, micron ratings and options available.

Nomenclature

JLPE — **25** — **36** — **05** — **F** — **B** — **D** — **1** — **S** — **C**

Product Line Diameter Nominal Length Micron Rating Efficiency Gasket End Cap Style Spring/Extensions End Cap Core

Code	Description
JLPE	Polyester
JLPP	Polypropylene

Code	Descr.
25	2.50"
27	2.750"
3	3.00"
6	6.00"

Code	Descr.
09	9.75"
10	10.00"
19	19.50"
20	20.00"
29	29.25"
30	30.00"
36	36.00"
40	40.00"
47	47.00"
60	60.00"

Code	Descr.
01	1μ
05	5μ
10	10μ
25	25μ
40	40μ
50	50μ*
60	60μ*
75	75μ*

*Available only in Polyester configuration

Code	Descr.
B	99.9%
F	90%

Code	Descr.
Blank	No Gasket
B	Buna-N
E	EPR
V	Viton
S	Silicone
T	TES

Code	Description
D	DOE
E	Spring/Extension
F	Finned/222 O-ring
K	Finned/Extension
O	222 O-ring/Closed
R	222 O-ring/Spring
S	Spring
X	Extension
Y	226 O-ring/Closed
Z	Finned/226 O-ring

Code	Description
1	Carbon Steel / NA
2	Stainless Steel/NA
3	Polypropylene/Polypropylene
5	SS/Polypropylene
6	Polypropylene/SS
7	CS/Polypropylene

Code	Description
Blank	Same as media
M	Tin Plated Steel
S	Stainless Steel

Code	Descr.
Blank	No Core
C	Core