


TCPO-Series Economy Grade Pleated Polypropylene

TCPO-Series High Purity Economy Grade Pleated Polypropylene Filter Cartridges provide an economical, 100% polypropylene element for removal of fine or coarse particulate from fluid streams.

The pleated depth media is encapsulated in an integral, continuous length, thermally-bonded structure for cleanliness, pressure tolerance, and chemical inertness. Offered in a beta 5000 absolute grade (99.98% efficient) in multiple end cap configurations. Manufactured in a clean-room environment to maintain high standards of purity and cleanliness. Compliant to NSF61 certification standards



Flow Rate vs Pressure Drop

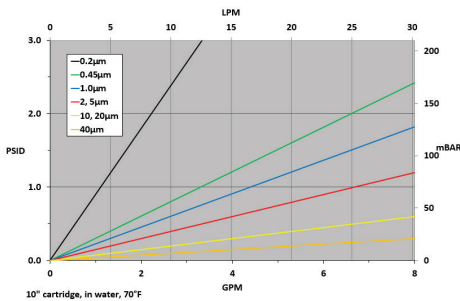

*All data is based on absolute rated medias. Nominally rated medias will result in a pressure drop reduction of approximately 10%.

Typical Applications

- Food & Beverage
- Deionized Water
- R.O. Pre-Filtration
- Process Water
- Fine Chemicals
- Plating Chemicals
- Wastewater
- Pharmaceuticals

Ordering Information

TCPO	Rating (µ)	Retention	Length	C	End Cap Style	O-Rings/Gaskets	-	Adders	-	041
	0.2	A = Absolute	10" (25.4 cm)		2 = DOE Flat Gasket	B = Buna		CS = 316SS Compression Spring		
	0.45/0.5		20" (50.8 cm)		3 = 222 w/ Fin	E = EPDM		FG = Glass Reinforced PP Core *		
	1.0		30" (76.2 cm)		4 = 222 w/ Flat Cap	S = Silicone		I = Stainless Steel Insert		
	2.0		40" (101.6 cm)		5 = 222 w/ Spring	T = Teflon® Encapsulated Viton®*		SS = Stainless Steel Core		
	5.0				6 = 226 w/ Flat Cap	V = Viton®*				
	10.0				7 = 226 w/ Fin	Z = Teflon® Encapsulated Silicone *				
	20.0				8 = 226 w/ Spring					
	40.0				16 = 213 Internal O-Ring					

Construction Materials

- Filtration Media..... Polypropylene
- Support Media..... Polypropylene
- End Caps..... Polypropylene
- Center Core..... Polypropylene
- Outer Support Cage..... Polypropylene
- O-Rings/Gaskets..... Buna, EPDM, Silicone, Teflon® Encapsulated Viton®, Viton®

Toxicity

All polypropylene components meet the specifications for biological safety per USP Class VI – 121°C for plastics.

Dimensions

- Length: 10 to 40 inches (25.4 to 101.6 cm) nominal
- Outside Diameter: 2.50 inches (6.35 cm) nominal

Operating Conditions

- Change Out ΔP (recommended).....35 PSID
- Temperature (max).....176°F (80°C)
- Differential Pressure (max).....60 PSID (4.1 bar) at 68°F (20°C)

Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required. For additional technical support, a product Performance Guide is available upon request.